


WOLTMAN CONCRETE PUMPS




	CP90	CP110	CP130
Weight [kg]	9500	9500	11.500
Pumpkit, Schwing	P1620	P1620	P2023
Delivery Cilinders [mm]	200 x 1.600	200 x 1.600	230 x 2.000
Concrete output max. [m ³ /h]	87	112	136
Pressure on concrete max. [bar]	60	60	85
Stroke rate [1/min]	28	37	27
Engine	Caterpillar C-4.4 Stage V 175 Pk (129 kW)	Caterpillar C-7.1 Stage V 257 Pk (205 kW)	Caterpillar C-7.1 Stage V 257 Pk (205 kW)
Fuel tank [l]	350	350	350
Hopper Capacity [l]	400	400	400
Controlling system	IFM	IFM	IFM
Automatic greasing system	✓	✓	✓
Painting in company colors	✓	✓	✓



WOLTMAN CONCRETE PUMPS

Dimensions

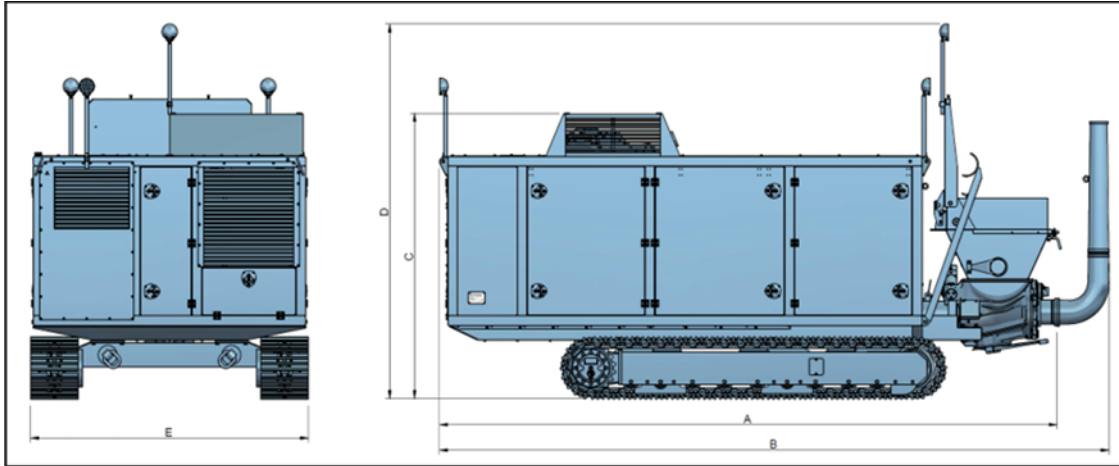

	CP90	CP110	CP130
A	5225 mm	5225 mm	5525 mm
B	5665 mm	5665 mm	6365 mm
C	2360 mm	2360 mm	2500 mm
D	3095 mm	3095 mm	3235 mm
E	2350 mm	2350 mm	2350 mm
Lashings, qty	4	4	4

Optional:

- ☐ Hydro Aircompressor, Dynaset HKR2500/10-67
- ☐ Airtank, 150l
- ☐ Watertank, 2x 270 l
- ☐ High pressure watercleaner, 250 Bar, 10 m hose & gun
- ☐ Remote Control moving
- ☐ Remote Control pumping